

Refrigerated Display Cabinet Test Report

Test Laboratory Name/Address

Laboratory of FROST TECH(Guangzhou) Refrigeration Facilities CO.,LTD.

Xiaowu Industrial Zone Dongchong Town,Nansha District,Guangzhou,

Guangdong Province,P.R.China.

Manufacturing Name/Address

FROST TECH(Guangzhou) Refrigeration Facilities CO.,LTD.

Xiaowu Industrial Zone Dongchong Town,Nansha District,Guangzhou,

Guangdong Province,P.R.China.

Brand Name

FROST TECH

Product

Refrigerated display cabinet

Description

The product covered by this report is a commercial used,cord connected refrigerated display cabinet.

Model(s)

SD60/180 C.C.

Voltage/Frequency

220-240V,50Hz

Rating current

12.5A

Drip tray Rating current

3A

Teststandard(s)orcriteria(s)

(EU)2019/2018

(EU)2019/2024

ENISO23953-2:2015

Conclusion

The results are in compliance with the requirements of the EC regulation 2019/2024.

Energy efficiency class: E

Prepared by:He Jianjin

Photo 1 - Front view:




Name plate:

COMMERCIAL DISPLAY CABINET	
Model	SD60/180 C.C.
Voltage/Frequency	220-240/50Hz
Rating current	15.5A
Refrigerant	R452A - R448A - R404A (R290 Available)
Compressor	Tecumseh CAJ4517Z
Controller	LAE LF28DE
Vesicant	CO2

Name:FROST TECH

Address:Xiaowu Industrial Zone Dongchong Town,Nansha District,Guangzhou,Guangdong Province,P.R.China.

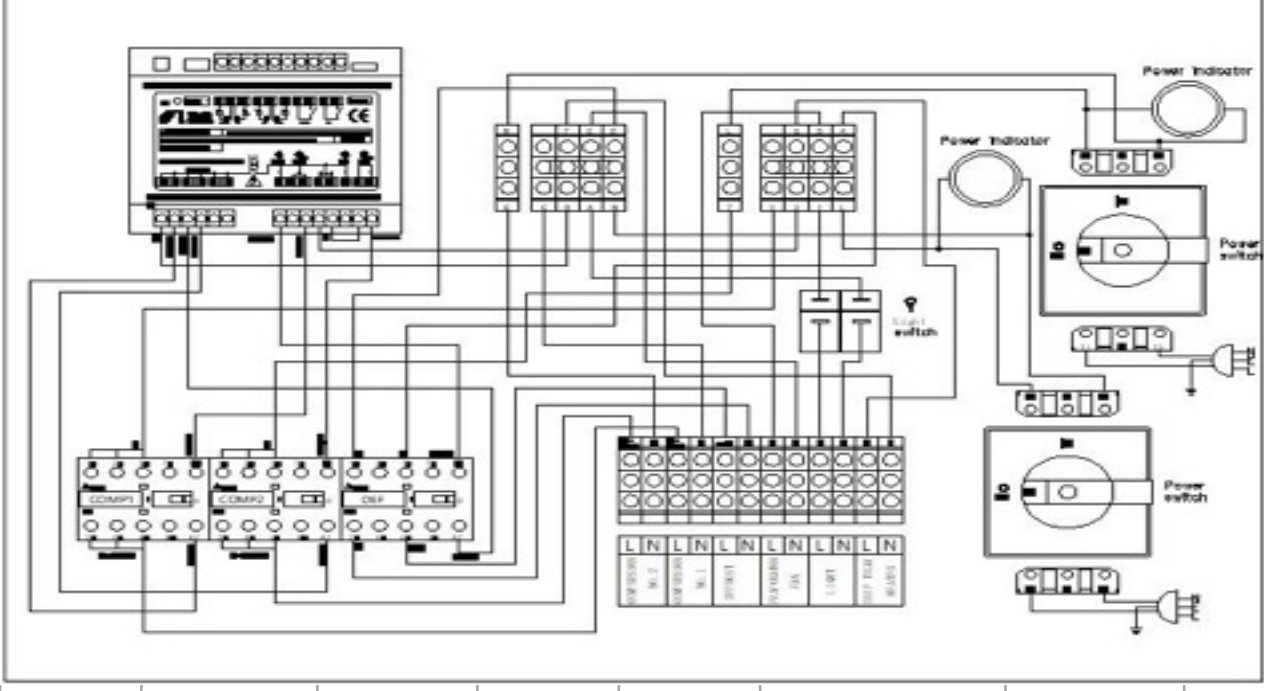

Product details:

Cabinet family code	VC2
Cabinet type	Integral
Model number of Unit Under Tested	SD60/180 C.C.
Brand name	FROST TECH
Operating temperature(s)	Chilled
Category	Vertical and combined supermarket refrigerator cabinets
Energy efficiency class	E
Climate class	3
M Package TemperatureClass	M2
Doors	N/A
Shelves	8 shelves(4 layers)
Light	LED strips
Refrigerant	R452A - R448A - R404A (R290 Available)
Charge of refrigerant(g)	1050g
Over all dimensions(W*D*H)[mm]	1800*600*2000

Performance parameter:

Highest temperature of the warmest M-package of the compartment(s) with chilled operating temperatures (°C)	+7
Lowest temperature of the coldest M-package of the compartment(s) with chilled operating temperatures, or the highest minimum temperature of all M-packages of the compartment(s) with chilled operating temperatures (°C)	-1

Critical Components:

Name	Manufacturer/trademark	Type/model	Technical data
Compressor	TECUMSEH	CAJ4517Z	220-240V,50Hz
Controller	LAE	LF28DE	220-240V,50Hz

Test Condition:


Dry Bulb	25±1°C
Relativehumidity	60±3%
Input Voltage	230V
InputFrequency	50Hz

Temperature and total display area Tests:

Temperature Class	Symbol	TemperatureTest(°C)			Total display area test(m
		Temperature	Limit	Verdict	
M2	θah	6.3	≤7	Pass	3.1
	θb	1.2	≥-1	Pass	

Calculation for EEI and conclusion:

Total display area TDA(m	3.1
M	9.1
N	9.1
P	1.1
Y	3.1
C	1
Calculation formula	SAE:365*P*(M+N*Y)*°C
Standard annual engery consumption SAE(Kwh/24h)	14979.96
Daily energy consumption Edaily (kWh/24h)	26.59
Annual energy consumption AE(kWh/a)	9707
Energy Efficiency Index EEI	64.7
Energy efficiency class	E
From 1 March 2021:EEI<100,Ice-cream freezer	Pass
From 1 freezer	

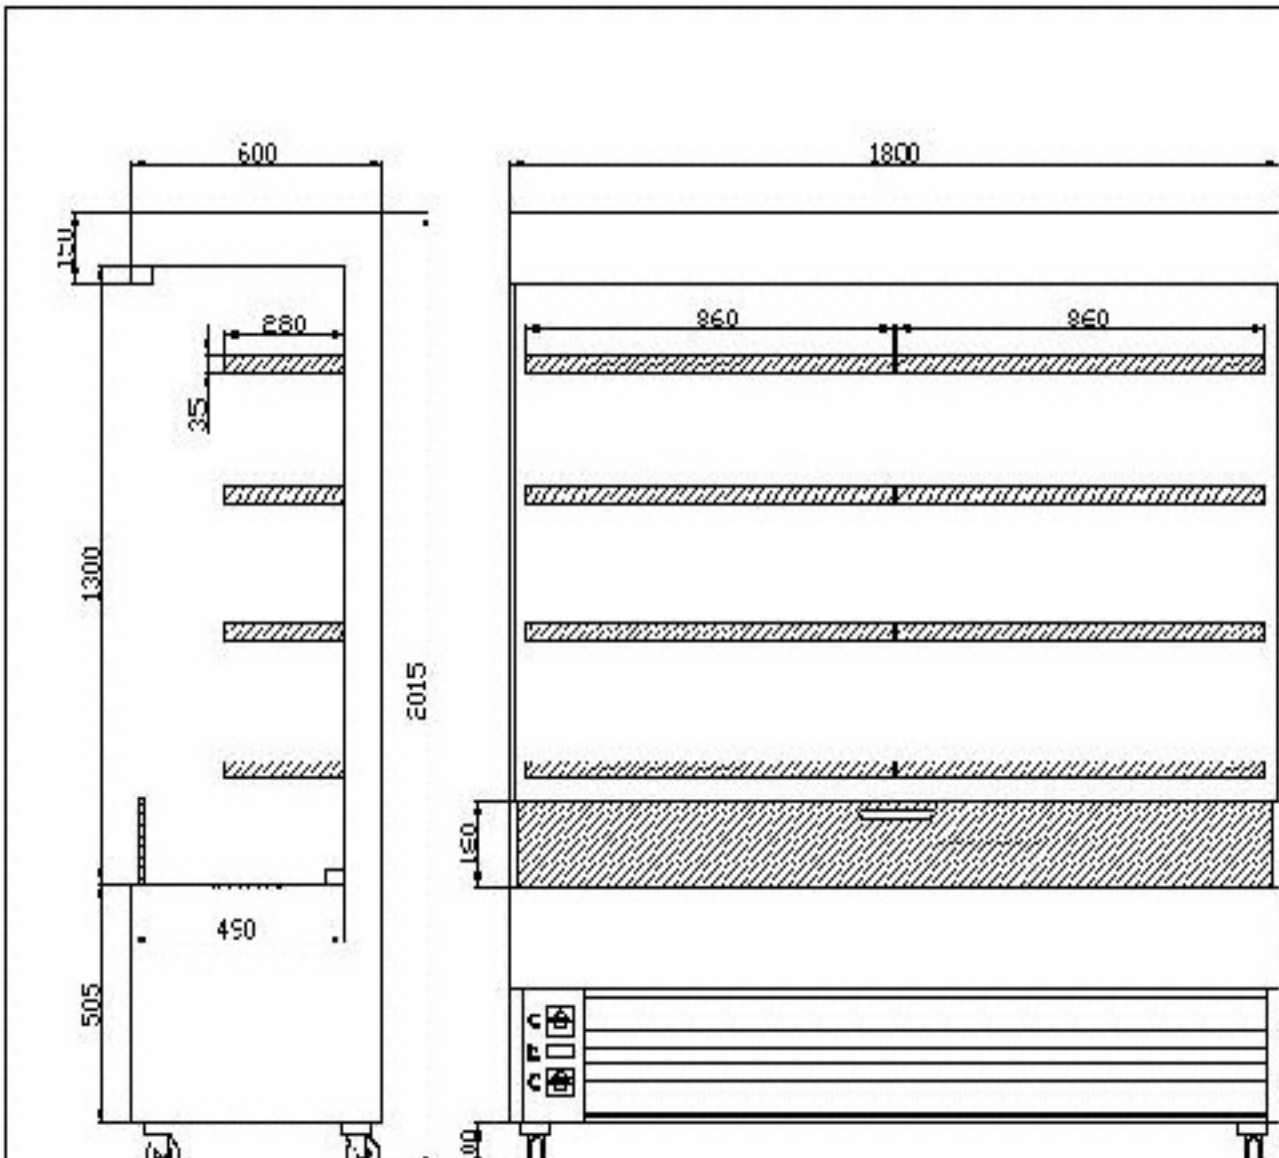

Type	Length	Depth	Height	Nom voltage/ frequency	Electrical fusing	Temperature range
SD60/180 C.C	1800 mm	600 mm	2015 mm	230 V/50 Hz	13A,slow	0...+7 °C

[illegible]

[illegible]