

Upright Display Freezer Cabinet Test Report

Test Laboratory Name/Address

Laboratory of FROST TECH(Guangzhou) Refrigeration Facilities CO.,LTD.
Xiaowu Industrial Zone Dongchong Town,Nansha District,Guangzhou,
Guangdong Province,P.R.China.

Manufacturing Name/Address

FROST TECH(Guangzhou) Refrigeration Facilities CO.,LTD.
Xiaowu Industrial Zone Dongchong Town,Nansha District,Guangzhou,
Guangdong Province,P.R.China.

Brand Name

FROST TECH

Product

upright display cabinet

Description

The product covered by this report is a commercial
used,cord connected upright display freezer cabinet.

Model(s)

UHGF120

Voltage/Frequency

220-240V,50Hz

Rating current

Teststandard(s)orcriteria(s)

(EU)2019/2018
(EU)2019/2024
ENISO23953-2:2015

Conclusion

The results are incompliance with there requirements
of the EC regulation 2019/2024.

Energy efficiency class: E

Prepared by:He Jianjin

Photo 1 - Front view:




Name plate:

COMMERCIAL DISPLAY CABINET	
Model	UHGF120
Voltage/Frequency	220-240/50Hz
Rating current	6.2A
Refrigerant	R452A-R448A/700g
Compressor	Tecumseh CAJ2446Z
Controller	LAE AD2-5C
Vesicant	Cyclopentane

Name:Vibocold A/S

Address:Holstebrovej 101 , 8800 Viborg,Denmark.

Photo 2 - Circuit diagram:

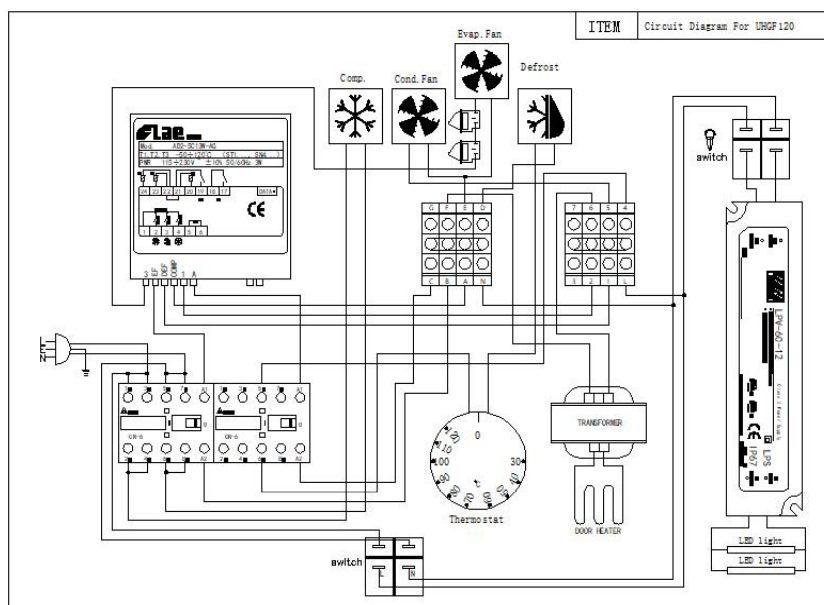

Product details:

Cabinet family code	
Cabinet type	Integral
Model number of Unit Under Tested	UHGF120
Brand name	FROST TECH
Operating temperature(s)	freezing
Category	Vertical and combined supermarket freezer cabinets
Energy efficiency class	E
Climate class	3
M PackageTemperatureClass	L1
Doors	2 Self-closing sliding glass doors
Shelves	5 adjustable shelves
Light	LED vertical light tube T8 16W
Refrigerant	R452A-R448A
Charge of refrigerant(g)	700g
Over all dimensions(W*D*H)[mm]	1200*650*1960

Performance parameter:

Highest temperature of the warmest M-package of the compartment(s) with chilled operating temperatures (°C)	-15
Lowest temperature of the coldest M-package of the compartment(s) with chilled operating temperatures, or the highest minimum temperature of all M-packages of the compartment(s) with chilled operating temperatures (°C)	-18

Critical Components:

Name	Manufacturer/trademark	Type/model	Technical data
Compressor	Tecumseh	CAJ2446Z	220-240V,50Hz
Controller	LAE	AD2-5C	220-240V,50Hz

Test Condition:


Dry Bulb	25±1°C
Relative humidity	60±3%
Input Voltage	230V
Input Frequency	50Hz

Temperature and total display area Tests:

Temperature Class	Symbol	Temperature Test(°C)			Total display
		Temperature	Limit	Verdict	area test(m ²)
L1	θ _{ah}	-15		Pass	1.42
	θ _b	-18		Pass	

Calculation for EEI and conclusion:

Total display area TDA(m ²)	1.42
M	7.5
N	19.3
P	1.1
Y	1.42
C	1
Calculation formula	SAE:365*P*(M+N*Y)*C
Standard annual energy consumption SAE(Kwh/24h)	14014.75
Daily energy consumption E _{daily} (kWh/24h)	24
Annual energy consumption AE(kWh/a)	8760
Energy Efficiency Index EEI	62.5
Energy efficiency class	E
From 1 March 2021:EEI<100,Ice-cream freezers:EEI<80	Pass
From 1 September 2023:EEI<80,Ice-cream freezers:EEI<50	Pass

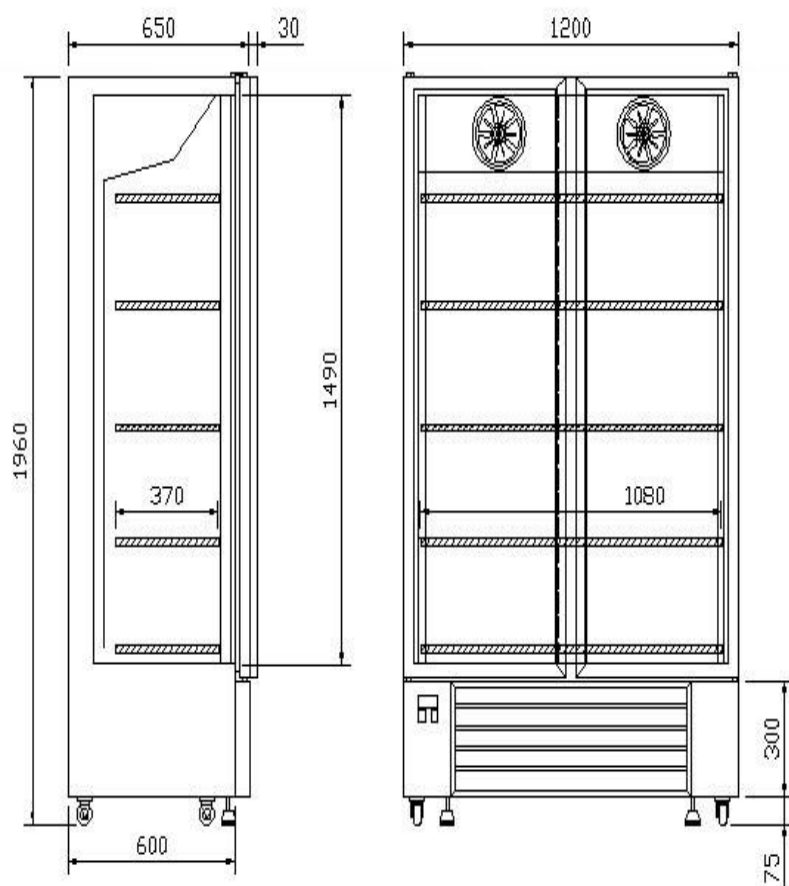

Type	Length	Depth	Height	Nom. voltage/ frequency	Electrical fusing	Temperature range
UHGF 120	1200 mm	650 mm	1960 mm	230 V/50 Hz	13A, slow	-24 ... -18 °C