


BUSINESS NAME

DELIVERY ADDRESS AND POSTCODE

CONTACT PHONE

HOW TO MEASURE A DOORWAY

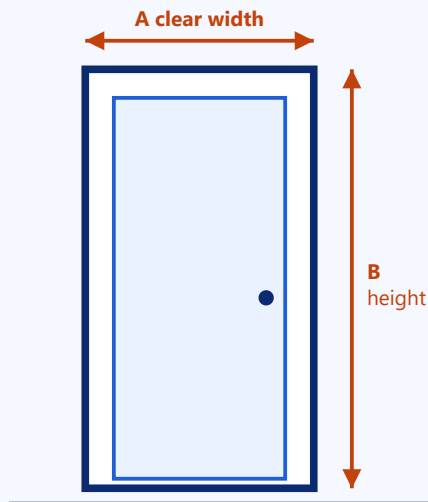

Measure the narrowest point, including the frame

Remove the door from its hinges if you need extra width. If a unit has to be tilted to pass through, check its diagonal against the door height.

Measurement	Your figure	
Fridge size, packed (W × D × H)		cm
Fridge size, unpacked (W × D × H)		cm
Fridge diagonal (tilt height)		cm
A. Entrance door clear width		cm
B. Entrance door height		cm
Narrowest internal door		cm
Narrowest corridor		cm
Tightest corner or turn		cm
Stairs: number of steps and width		
Lift: door width and inside depth		cm
Final position: space available (W × D × H)		cm
Distance to the 13 A socket		cm

✓	Check	Notes
ON THE DAY		
☐	Parking or unloading space for a van near the entrance (check restrictions and loading times)	
☐	Step-free route, or steps noted above	
☐	Floor protected and route cleared of stock and furniture	
☐	Old unit emptied, defrosted and switched off if it is being removed	
☐	Someone on site to show the way and check the unit	
☐	Contact phone number given to the delivery team	

AFTER DELIVERY

- Let the unit stand upright before switching it on, for as long as the manufacturer says.
- Leave it to reach temperature before you load any food.
- Record the make, model and serial number in your equipment register.

TIP

- Send these measurements to your supplier with your order.
- Most failed deliveries come from a door, a staircase or a lift that was not measured.